


## 130V-020

## Shape and size

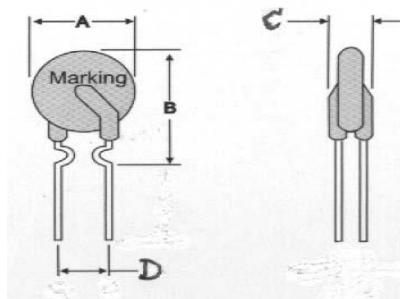

Model	A	B	C	D	Lead.
	max.	max.	max	Type	$\Phi$
130V-020	7.6mm	13.5mm	3.8mm	5.1	0.60

Lead wire material: tin-plated metal wire, 0.60mm.

Encapsulation material: Flame-retardant epoxy powder, meeting UL94V-0 requirements

## Electrical performance

Maximum overload current	3A <sub>AC</sub>	Maximum voltage	130V <sub>AC</sub>
Maximum non-operating current 25°C±2°C	200mA	Minimum operating current 25°C	400mA
Starting zero-power resistor	1. 9–4. 0 Ω	Maximum resistance one hour after action	12 Ω

## Testing conditions and delivery standards

Inspection items	Test	Delivery standard
Starting zero-power resistor	25°C±2°C, Place in the air	1. 9–4. 0 Ω
Non-operating current	25°C±2°C, 200mA, Maintain 60min	Non-operating
Typical action time	25°C±2°C, 1A	Less than 5S
Motion durability	130V, 3A, 15min	No open flame or burning

Working temperature : -40 to 85

Packaging conditions: 1000pcs per bag