

2RXXXS-8×6 Series

Features


- Size: 8.2mm*6mm
- Stable breakdown voltage.
- High insulation resistance.
- Low capacitance ($\leq 1\text{pF}$)
- High holdover voltage
- Storage and operational temperature: $-40^{\circ}\text{C} \sim +90^{\circ}\text{C}$

Applications

- Transient Voltage Surge Suppression(TVSS)
- Cable Telephone Product
- Modems/Cable Modems
- Broadband/CATV/Coaxial Protectors
- Communication Lines
- Power Supplies

Specification Status:Draft

(mm)

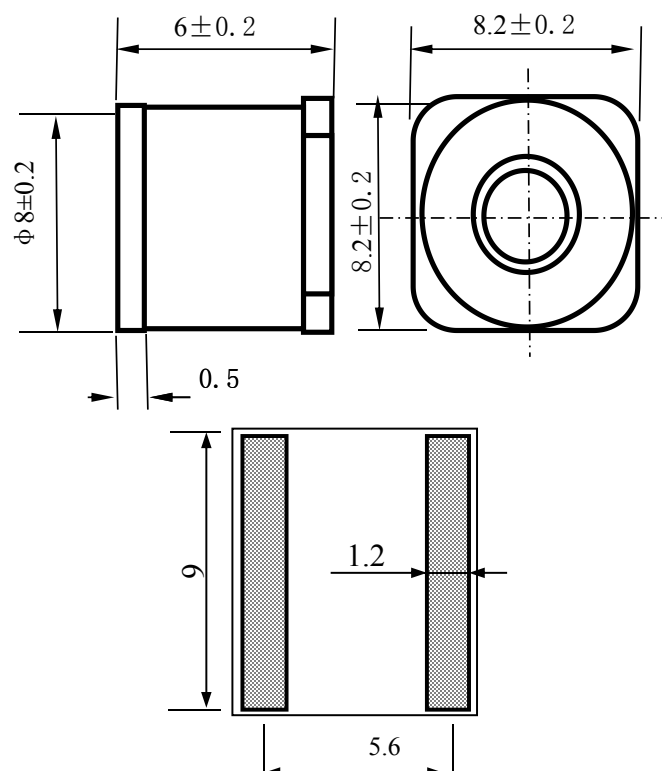

Electrical Characteristics (TA = 25 °C unless otherwise noted)


Part Number	DC Breakdown Voltage	Tolerance	Impulse Spark-over Voltage	Impulse Discharge Current 10hits(5hits each polarity)	AC Discharge Current 5 hits	Insulation Resistance*	Capacitance
	100V/s	of Vs	1kv/ μs	8/20 μs	50Hz	G Ω	1MHz
2R075S-8×6	75V	$\pm 20\%$	$\leq 600\text{V}$	10KA	10A	≥ 10	$\leq 1\text{pF}$
2R090S-8×6	90V	$\pm 20\%$	$\leq 600\text{V}$	10KA	10A	≥ 10	$\leq 1\text{pF}$
2R150S-8×6	150V	$\pm 20\%$	$\leq 700\text{V}$	10KA	10A	≥ 10	$\leq 1\text{pF}$
2R200S-8×6	200V	$\pm 20\%$	$\leq 700\text{V}$	10KA	10A	≥ 10	$\leq 1\text{pF}$
2R230S-8×6	230V	$\pm 20\%$	$\leq 700\text{V}$	10KA	10A	≥ 10	$\leq 1\text{pF}$
2R300S-8×6	300V	$\pm 20\%$	$\leq 900\text{V}$	10KA	10A	≥ 10	$\leq 1\text{pF}$
2R350S-8×6	350V	$\pm 20\%$	$\leq 1000\text{V}$	10KA	10A	≥ 10	$\leq 1\text{pF}$
2R400S-8×6	400V	$\pm 20\%$	$\leq 1000\text{V}$	10KA	10A	≥ 10	$\leq 1\text{pF}$
2R470S-8×6	470V	$\pm 20\%$	$\leq 1200\text{V}$	10KA	10A	≥ 10	$\leq 1\text{pF}$
2R600S-8×6	600V	$\pm 20\%$	$\leq 1400\text{V}$	10KA	10A	≥ 10	$\leq 1\text{pF}$

1)At delivery AQL 0.65 leave II Military Standard 105 E.


2)In ionized mode

3)Test according to ITU-T Rec.k.12


Marking

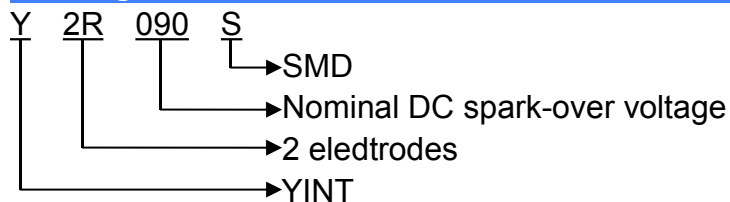

Reflow soldering curve

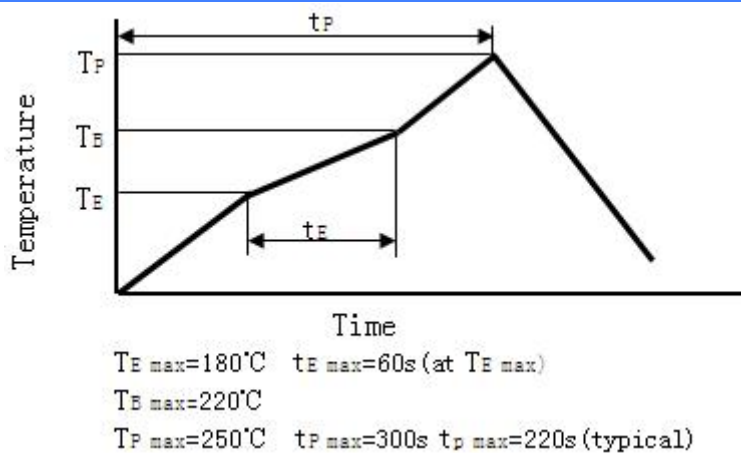

Package

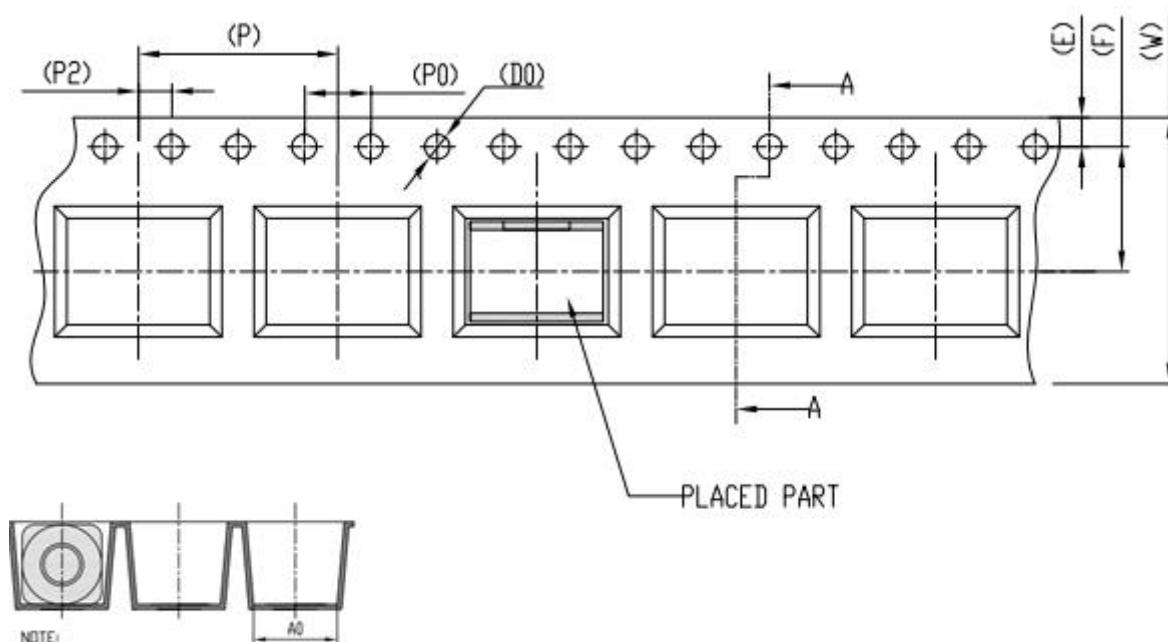

- NOTE:
1. Material: POLYSTYRENE;
 2. All dimensions in millimeters;
 3. 10 sprocket hole pitch cumulative tolerance $\pm 0.2\text{mm}$.
 4. Part conforms to IEC 60286-3.

DIMENSION IN MM							
W	16.00±0.30	P	12.00±0.10	AO	8.60±0.10	BO	6.40±0.10
S		P0	4.00±0.10				
E	1.75±0.10	P2	2.00±0.10				
F	7.50±0.10	D0	∅1.50 ^{+0.10} ₋₀	K0	8.50±0.10		
T	0.50±0.05	D1				COLOR : B	