

SMCJ-H Diode Series

Description


The SMCJ-H series is designed to protect voltage sensitive components from high voltage, high energy transients. They have excellent clamping capability, high surge capability, low zener impedance and fast response time. The SMCJ-H series is supplied in YINT Semiconductor's exclusive, cost-effective, highly reliable and is ideally suited for use in communication systems, automotive, numerical controls, process controls, medical equipment, business machines, power supplies and many other industrial/consumer Applications.

Features

- Case: DO-214AB/SMC
- For surface mounted applications in order to optimize board space.
- 1500 W peak pulse power capability with a 10/1000 μ s waveform
- Typical failure mode is short from over-specified voltage or current.
- High Temperature soldering: 260°C/10 seconds at terminals.
- Meet MSL level1, per J-STD-020, LF maximum peak of 260°C
- IEC61000-4-2 (ESD) ± 30 kV (air), ± 30 kV (contact).
- AEC-Q101 qualified



Functional Diagram

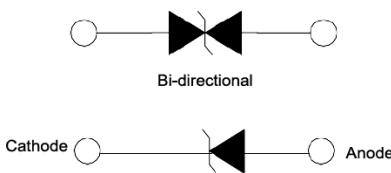

Applications

TVS devices are ideal for the protection of I/O Interfaces, Vcc bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications.

Maximum Ratings (TA=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation by 10/1000 μ s Waveform (note1 note 2)	P _{PK}	1500	Watts
Peak Forward Surge Current 8.3ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method) (Note 3)	I _{FSM}	200	Amps
Steady State Power Dissipation @ T _L = 50 °C	P _{M(AV)}	6.5	Watts
Maximum Instantaneous Forward Voltage @ I _{PP} = 50 A (For Unidirectional Units Only)	V _F	3.5	Volts
Operating Temperature Range	T _J	-55 to +150	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C

NOTES:


1. Non-repetitive current pulse, per Pulse Waveform graph and derated above T_A = 25 °C per Pulse Derating Curve.
2. Thermal Resistance Junction to Lead.
3. 8.3 ms Single Half-Sine Wave duty cycle = 4 pulses maximum per minute (unidirectional units only).

Electrical Characteristics (TA = 25 °C unless otherwise noted)

Part Number (Bi)	Part Number (Uni)	MARKING		Reverse Stand off Voltage V _R (Volts)	Breakdown Voltage V _{BR} (Volts)@I _T		Test Current I _T (mA)	Maximum Reverse Leakage I _R @ V _R (μA)	Maximum Peak Pulse Current I _{pp} (A)	Maximum Clamping Voltage V _C @ I _{pp} (V)
		BI	UNI		Min .V	Max .V				
SMCJ5.0CA-H	SMCJ5.0A-H	BDEH	GDEH	5.0	6.40	7.00	10	800	163.0	9.2
SMCJ6.0CA-H	SMCJ6.0A-H	BDGH	GDGH	6.0	6.67	7.37	10	800	145.6	10.3
SMCJ 6.5CA-H	SMCJ6.5A-H	BDKH	GDKH	6.5	7.22	7.90	10	500	134.0	11.2
SMCJ7.0CA-H	SMCJ7.0A-H	BDMH	GDMH	7.0	7.78	8.60	10	200	125.0	12.0
SMCJ 7.5CA-H	SMCJ7.5A-H	BDPH	GDPH	7.5	8.33	9.21	1	100	116.3	12.9
SMCJ 8.0CA-H	SMCJ8.0A-H	BDRH	GDRH	8.0	8.89	9.83	1	50	110.3	13.6
SMCJ8.5 CA-H	SMCJ8.5A-H	BDTH	GDTH	8.5	9.44	10.40	1	20	104.2	14.4
SMCJ9.0 CA-H	SMCJ9.0A-H	BDVH	GDVH	9.0	10.00	11.10	1	10	97.4	15.4
SMCJ10CA-H	SMCJ10A-H	BDXH	GDXH	10.0	11.10	12.30	1	1	88.3	17.0
SMCJ11CA-H	SMCJ11A-H	BDZH	GDZH	11.0	12.20	13.50	1	1	82.5	18.2
SMCJ12CA-H	SMCJ12A-H	BEEH	GEEH	12.0	13.30	14.70	1	1	75.4	19.9
SMCJ13CA-H	SMCJ13A-H	BEGH	GEGH	13.0	14.40	15.90	1	1	69.8	21.5
SMCJ14CA-H	SMCJ14A-H	BEKH	GEKH	14.0	15.60	17.20	1	1	64.7	23.2
SMCJ15CA-H	SMCJ15A-H	BEMH	GEMH	15.0	16.70	18.50	1	1	61.5	24.4
SMCJ16CA-H	SMCJ16A-H	BEPH	GEPH	16.0	17.80	19.70	1	1	57.7	26.0
SMCJ17CA-H	SMCJ17A-H	BERH	GERH	17.0	18.90	20.90	1	1	54.4	27.6
SMCJ18CA-H	SMCJ18A-H	BETH	GETH	18.0	20.00	22.10	1	1	51.4	29.2
SMCJ20CA-H	SMCJ20A-H	BEVH	GEVH	20.0	22.20	24.50	1	1	46.3	32.4
SMCJ22CA-H	SMCJ22A-H	BEXH	GEXH	22.0	24.40	26.90	1	1	42.3	35.5
SMCJ24CA-H	SMCJ24A-H	BEZH	GEZH	24.0	26.70	29.50	1	1	38.6	38.9
SMCJ26CA-H	SMCJ26A-H	BFEH	GFEH	26.0	28.90	31.90	1	1	35.7	42.1
SMCJ28CA-H	SMCJ28A-H	BFGH	GFGH	28.0	31.10	34.40	1	1	33.1	45.4
SMCJ30CA-H	SMCJ30A-H	BFKH	GFKH	30.0	33.30	36.80	1	1	31.0	48.4
SMCJ33CA-H	SMCJ33A-H	BFMH	GFMH	33.0	36.70	40.60	1	1	28.2	53.3
SMCJ36CA-H	SMCJ36A-H	BFPH	GFPH	36.0	40.00	44.20	1	1	25.9	58.1
SMCJ40CA-H	SMCJ40A-H	BFRH	GFRH	40.0	44.40	49.10	1	1	23.3	64.5
SMCJ43CA-H	SMCJ43A-H	BFTH	GFTH	43.0	47.80	52.80	1	1	21.7	69.4
SMCJ45CA-H	SMCJ45A-H	BFVH	GFVH	45.0	50.00	55.30	1	1	20.6	72.7
SMCJ48CA-H	SMCJ48A-H	BFXH	GFXH	48.0	53.30	58.90	1	1	19.4	77.4
SMCJ51CA-H	SMCJ51A-H	BFZH	GFZH	51.0	56.70	62.70	1	1	18.2	82.4
SMCJ54CA-H	SMCJ54A-H	BGEH	GGEH	54.0	60.00	66.30	1	1	17.3	87.1
SMCJ58CA-H	SMCJ58A-H	BGGH	GGGH	58.0	64.40	71.20	1	1	16.1	93.6
SMCJ60CA-H	SMCJ60A-H	BGKH	GGKH	60.0	66.70	73.70	1	1	15.5	96.8
SMCJ64CA-H	SMCJ64A-H	BGMH	GGMH	64.0	71.10	78.60	1	1	14.6	103.0
SMCJ70CA-H	SMCJ70A-H	BGPH	GGPH	70.0	77.80	86.00	1	1	13.3	113.0

Part Number (Bi)	Part Number (Uni)	MARKING		Reverse Stand off Voltage V_R (Volts)	Breakdown Voltage V_{BR} (Volts)@ I_T		Test Current I_T (mA)	Maximum Reverse Leakage I_R @ V_R (μ A)	Maximum Peak Pulse Current I_{PP} (A)	Maximum Clamping Voltage V_C @ I_{PP} (V)
		BI	UNI		Min .V	Max .V				
SMCJ75CA-H	SMCJ75A-H	BGRH	GGRH	75.0	83.30	92.10	1	1	12.4	121.0
SMCJ78CA-H	SMCJ78A-H	BGTH	GGTH	78.0	86.70	95.80	1	1	11.9	126.0
SMCJ85CA-H	SMCJ85A-H	BGVH	GGVH	85.0	94.4	104.0	1	1	11.0	137.0
SMCJ90CA-H	SMCJ90A-H	BGXH	GGXH	90.0	100.0	111.0	1	1	10.3	146.0
SMCJ100CA-H	SMCJ100A-H	BGZH	GGZH	100.0	111.0	123.0	1	1	9.3	162.0
SMCJ110CA-H	SMCJ110A-H	BHEH	GHEH	110.0	122.0	135.0	1	1	8.5	177.0
SMCJ120CA-H	SMCJ120A-H	BHGH	GHGH	120.0	133.0	147.0	1	1	7.8	193.0
SMCJ130CA-H	SMCJ130A-H	BHKH	GHKH	130.0	144.0	159.0	1	1	7.2	209.0
SMCJ150CA-H	SMCJ150A-H	BHMH	GHMH	150.0	167.0	185.0	1	1	6.2	243.0
SMCJ160CA-H	SMCJ160A-H	BHPH	GHPH	160.0	178.0	197.0	1	1	5.8	259.0
SMCJ170CA-H	SMCJ170A-H	BRRH	GRRH	170.0	189.0	209.0	1	1	5.5	275.0

I-V Curve Characteristics

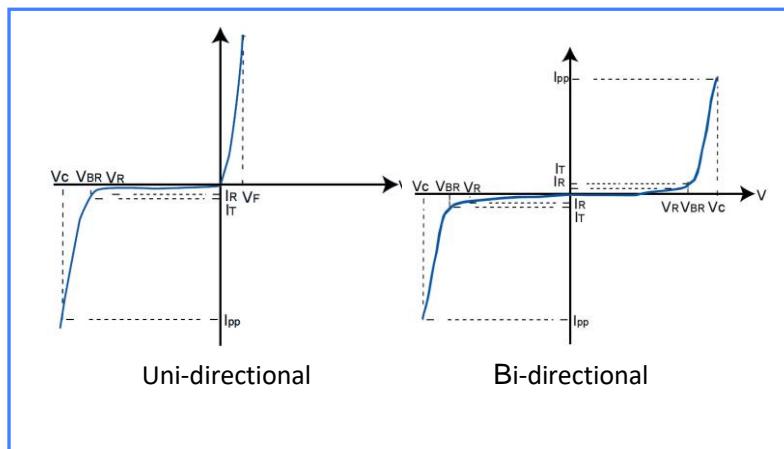

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T (Test Current)

Rating & Characteristic Curves

Figure 1- Peak pulse power derating curve

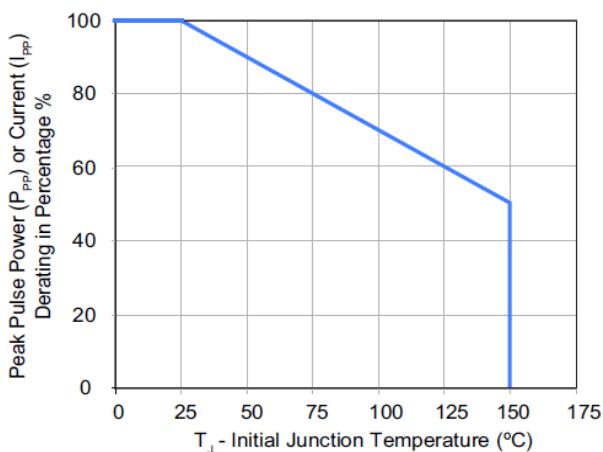


Figure 2- Pulse waveform

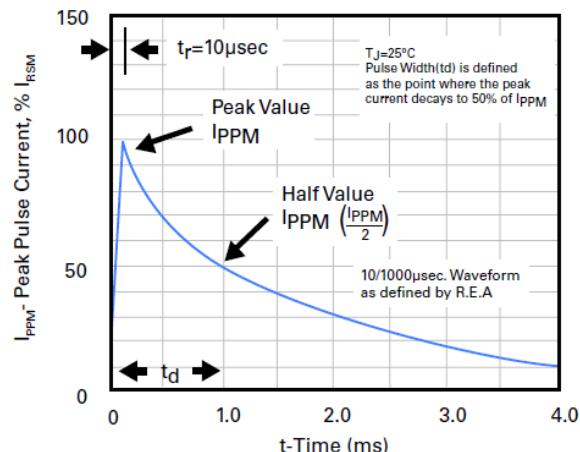


Figure 3- Peak pulse power rating curve

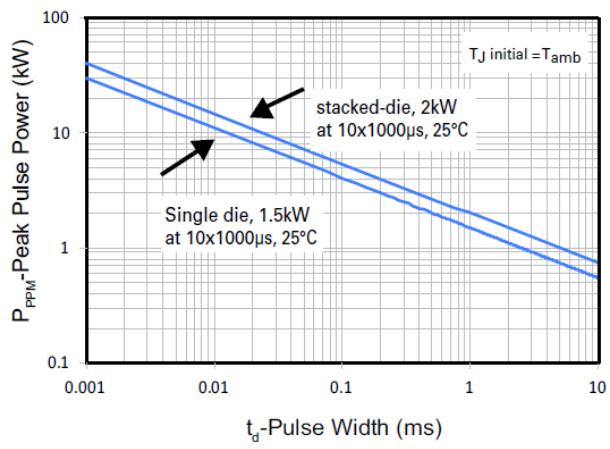


Figure 4- Maximum Non-Repetitive Forward Surge Current Uni-Directional Only



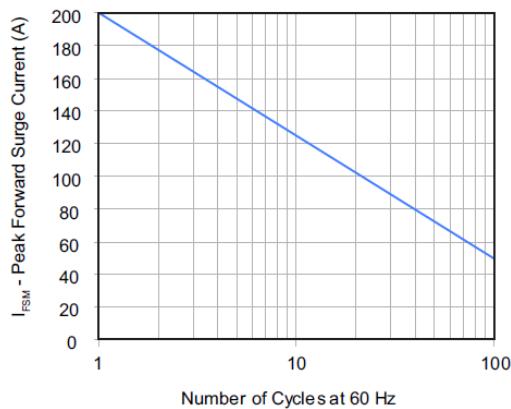


Figure 5- Typical Junction Capacitance

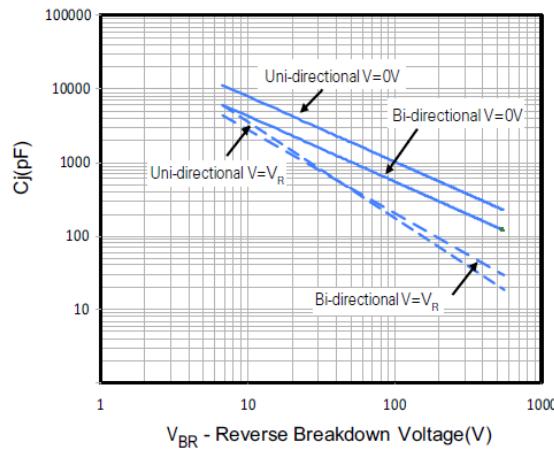


Soldering Parameters

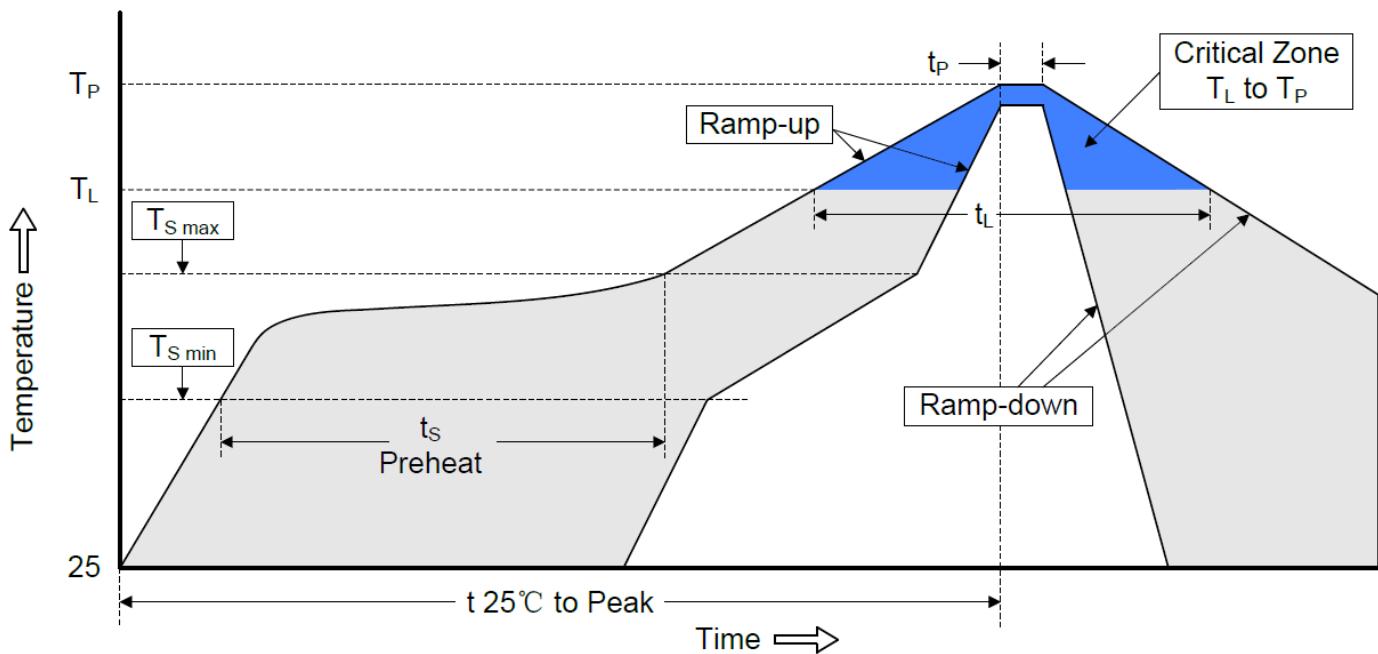



Profile Feature	Pb-Free Assembly
Average ramp-up rate (T_L to T_P)	3°C/second max.
Preheat	
- Temperature Min (T_S min)	150°C
- Temperature Max (T_S max)	200°C
- Time (min to max)(t_S)	60-180 seconds
T_S max to T_L	
- Ramp-up Rate	3°C/second max.
Time maintained above:	
- Temperature (T_L)	217°C
- Time (t_L)	60-150 seconds
Peak Temperature (T_P)	260°C
Time within 5°C of actual Peak Temperature (t_P)	20-40 seconds
Ramp-down Rate	6°C /second max.
Time 25°C to Peak Temperature	8 minutes max.

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

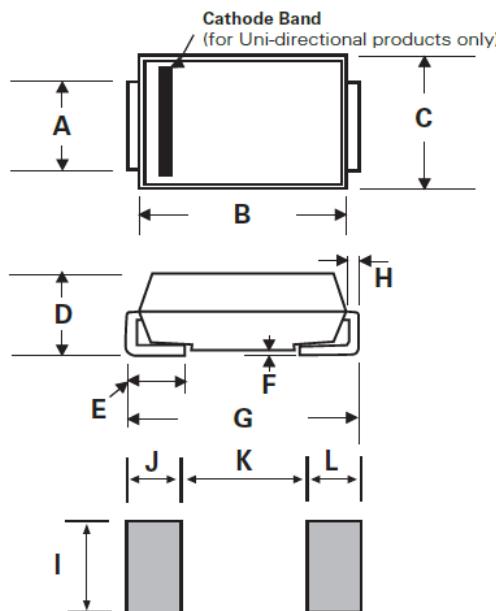

Dimensions	Millimeter	
	Min	Max
A	2.750	3.250
B	6.500	7.100
C	5.500	6.220
D	2.060	2.700
E	0.760	1.520
F	-	0.250
G	7.400	8.400
H	0.152	0.305
I	3.300	-
J	2.400	-
K	-	4.200
L	2.400	-

Part Number Code & Marking Code

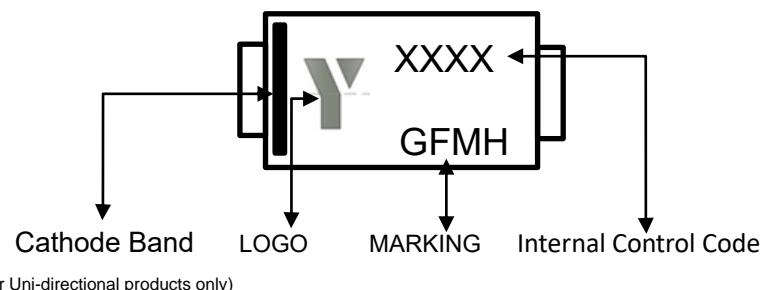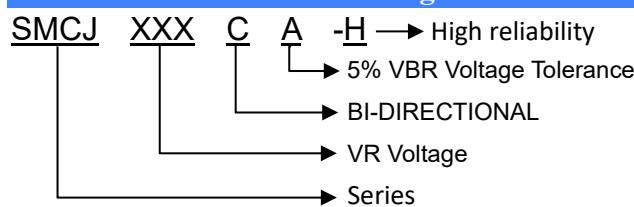

Disclaimer

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.